



LIMODOR
INNOVATION ON AIR



Limax

*Free from humidity and
unpleasant smell*



Limax



Limax 100 TH - Cover plate with LCD display

Assembly

The installation of the entire Limax fan series is only suitable for wall installation.

The screwless clamp connector makes the installation process easy and time saving.

Types

Serie Standard

The Limax Standard series is the standard version. On/Off switching by light switch or separate switch.

Serie T

The T series provides adjustable follow-up time from 3 to 15 minutes for proper air condition.

Serie TH

The TH series is permanently checking on humidity and temperature. Follow-up time and humidity range can be adjusted individually. The series also comes with a LCD screen cover plate.


General

The Limax exhaust fan quickly removes humidity and unpleasant smell from your bathroom and toilet. Every type is fitting perfectly to short exhaust pipes. The installation through an exterior wall with a weather protection grille for front covering would be the best installation example.

Optics

The visible cover plate is made of glass in white color. It can be removed easily by screwing and can be cleaned with clear water.

The fan is extracting on each side which helps to avoid dirty looks in the long run.


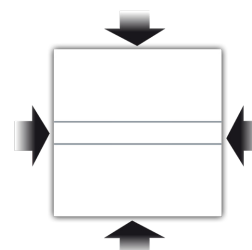


The Limax TH series does besides the modest white design come with a blue LCD display which shows temperature and humidity.



Limax 100 T - Cover plate without LCD display

Noble design with energy efficiency

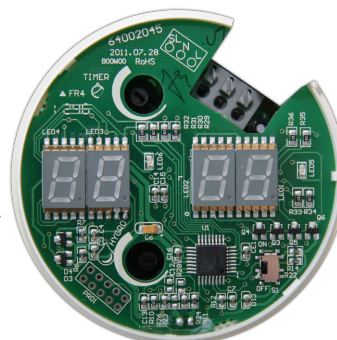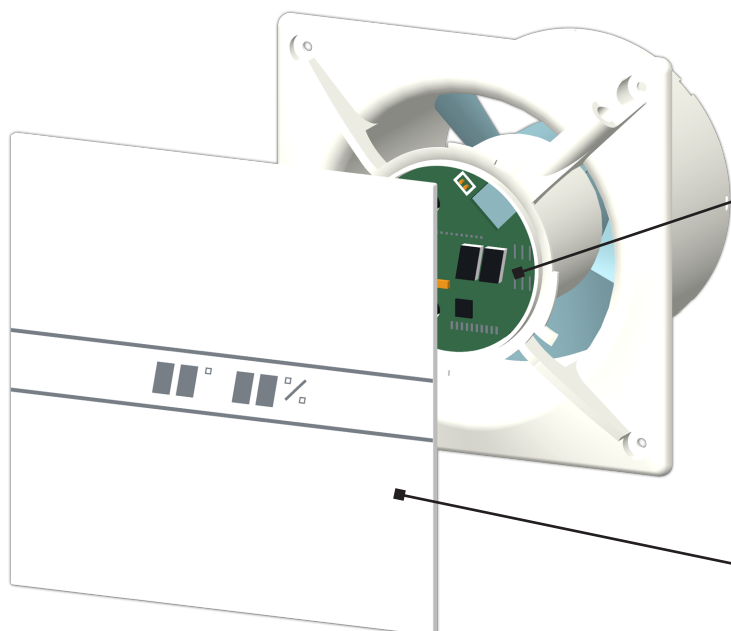

Well-engineered technology

The energy-saving electric motor with a power consumption of only 8 watts at 115 m³/h is one of the leading devices in this category.



Noble design

The cover plate made of glass additionally shows room temperature and humidity on a LCD display.

(Display only with TH series)

Technical data:

Type	Art.Nr.	Version	Ø	Rotation speed	Power consumption	Air flow volume	Sound pressure level
			[mm]	[rpm]	[W]	[m³/h]	[dB(A)]
Limax 100 TH	70028		100	Level 1 - 1100	4	36	17
				Level 2 - 2600	8	115	31
Limax 100 T	70044		100	2600	8	115	31
Limax 100	70029		100	2600	8	115	31
Limax 120 TH	70046		120	Level 1 - 900	6	140	19
				Level 2 - 2400	11	210	33
Limax 120	70045		120	2400	11	210	33

The electrical connection is identical for all Limax products – 230V / 50Hz.

Version:



STANDARD



TIMER


Follow-up time adjustable from 3 to 15 minutes.



HYGRO

Adjustable air humidity range from 40 to 90% and follow-up time from 0 to 15 minutes.

dimensions

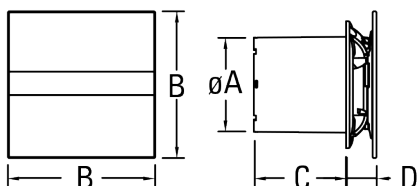

Model	Ø A	B	C	D
Limax 100	98	150	94	28,5
Limax 120	118	170	94	35


Dimensions in mm



LIMODOR
AirClean
AirOdor
AirOnova
AirVital
AirVital PRIME
AirBase
AquaVent
Limax

QUALITY MADE IN AUSTRIA

In previous years, LIMOT demonstrated technical innovation-strength, which reflects on our LIMODOR products. LIMODOR - products are made of superior material and rigorously tested before distribution. The test results are monitored externally by TÜV, ÖVE and VDE.

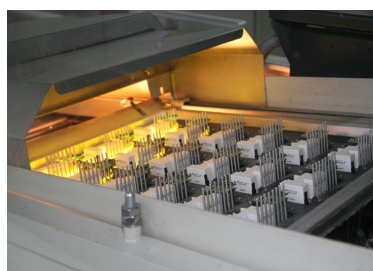

LIMOT Elektromotorenbauges.m.b.H & Co. KG

HEAD OFFICE - Leonding
 Paschinger Straße 56, A - 4060 Leonding
 e-mail: office@limot.com

SALES OFFICE - Vienna
 Prechtlgasse 9, A - 1090 Vienna
 e-mail: office.wien@limot.com

Tel.: +43 (0)57556
www.limodor.com